

LECTOR TONY MINI


4,5W 34°



INFORMACIÓN TÉCNICA



Cuerpo Aluminio
 Marco Aluminio
 Difusor Policarbonato

TM4S30	□	LECTOR TONY MINI	4,5W	3000K	430lm
TM4S32	■	LECTOR TONY MINI	4,5W	3000K	430lm



CURVA FOTOMÉTRICA

TM4S30/TM4S32

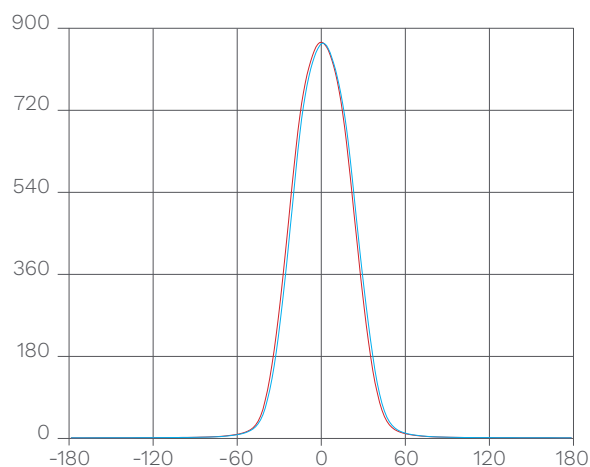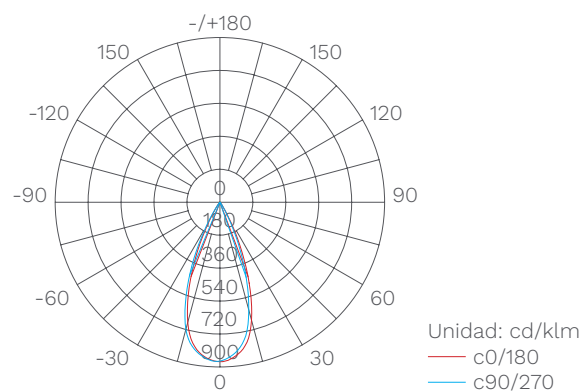

GARANTÍA 3 AÑOS	A 34°	⊥	220V 240V	EQUIPO ELECT. INCL.	CHIP BRIDGELUX	IP65	95 lm/W	CRI ≥90	25.000 HRS	>0,6	UGR <16	F	IK06
-----------------------	----------	---	--------------	---------------------------	-------------------	------	------------	------------	---------------	------	------------	---	------

CE 0%
MERCURIO

♻️

RoHS