

## DODO

10W 45°



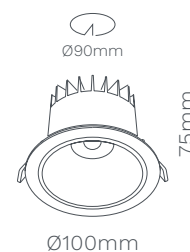
## INFORMACIÓN TÉCNICA

Cuerpo Aluminio  
 Marco Aluminio  
 Reflector / Embellecedor Policarbonato

|        |    |      |     |       |       |
|--------|----|------|-----|-------|-------|
| DD10CT | □□ | DODO | 10W | CCT*  | 700lm |
| DD1B27 | ■  | DODO | 10W | 2700K | 700lm |
| DD1B30 | ■  | DODO | 10W | 3000K | 700lm |
| DD1B40 | ■  | DODO | 10W | 4000K | 700lm |

\*CCT: 2700K - 3000K - 4000K

Consultar regulación



## ACCESORIOS



Aro decorativo

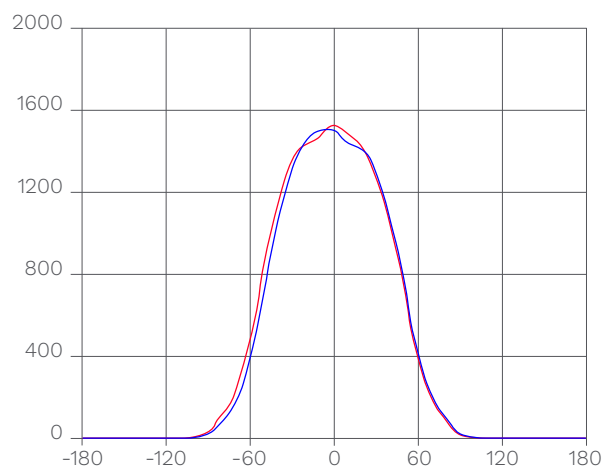
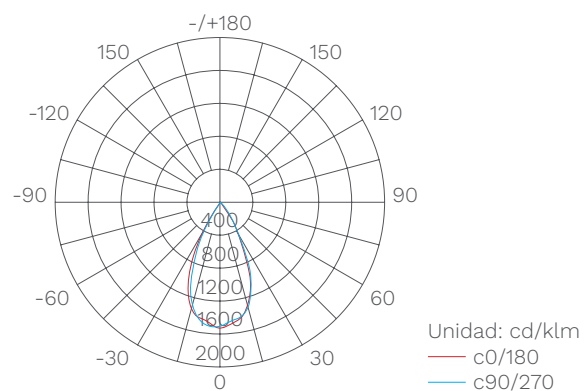
■ DD0001

■ DD0002

■ DD0003

## CURVA FOTOMÉTRICA

DD10CT/ DD1B30 3000K

GARANTÍA  
3  
AÑOS220V  
240VEQUIPO  
ELECT.  
INCL.CHIP  
CREE

IP54

70  
lm/WCRI  
≥9030.000  
HRS

&gt;0,7

UGR  
<190%  
MERCURIO

RoHS