

SURFACE ROUND

18W/24W 120° IP54 CCT-SWITCH




INFORMACIÓN TÉCNICA

Cuerpo Aluminio
Reflector / Embellecedor Policarbonato opal

UD0618	□	SURFACE ROUND	18W	CCT*	1980lm
UD0619	□	SURFACE ROUND	24W	CCT*	2640lm

*CCT: 3000K - 4000K - 5000K



GARANTÍA
3
AÑOS



220V
240V

EQUIPO
ELECT.
INCL.

CCT

IP54

110
lm/W

CRI
≥85

30.000
HRS

≥0,9





SURFACE ROUND

18W/24W 120° IP54 CCT-SWITCH



CURVA FOTOMÉTRICA

UD0618 **3000K**

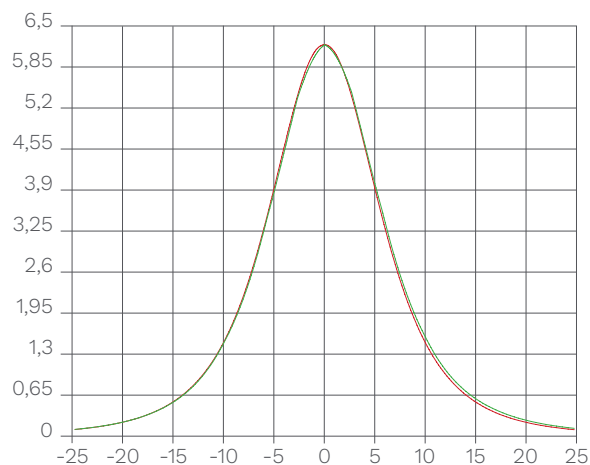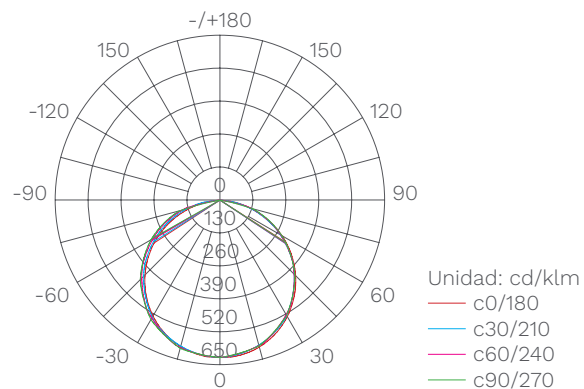

UD0619 **3000K**

