

SPOTLIGHT MICRO MAGNET 1L

3W 36° 48V




INFORMACIÓN TÉCNICA

Cuerpo: Aluminio
Difusor: Policarbonato
Reflector / Embellecedor: Aluminio



MTL220	■	SPOTLIGHT MICRO MAGNET 1L	3W	2700K	200lm
MTL230	■	SPOTLIGHT MICRO MAGNET 1L	3W	3000K	225lm

Disponibilidad de reflector 24°



CURVA FOTOMÉTRICA

MTL230

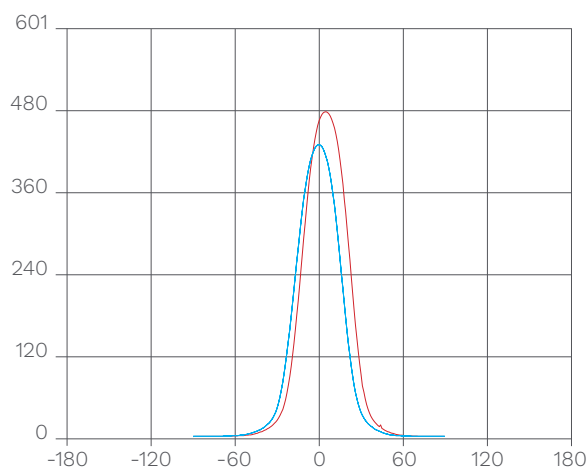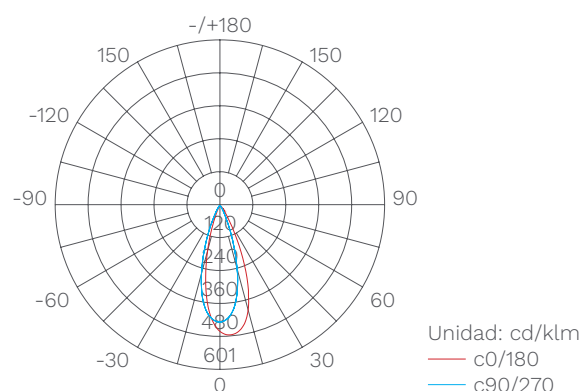

GARANTÍA 3 AÑOS	36°	180°	180°	III	ADAPT. MAGNÉTICO	48V	LED BRIDGELLUX	CHIP COB	IP20	66,66 lm/W	CRI ≥90	50.000 HRS	50.000	>0,9
UGR <19	F													