

SPOTLIGHT TWINS MICRO MAGNET 2L

2x3W 36° 48V




INFORMACIÓN TÉCNICA

Cuerpo Aluminio
Difusor Policarbonato
Reflector / Embellecedor Aluminio



MTL222	■	SPOTLIGHT TWINS MICRO MAGNET 2L	2x3W	2700K	400lm
MTL232	■	SPOTLIGHT TWINS MICRO MAGNET 2L	2x3W	3000K	425lm

Disponibilidad de reflector 24°



CURVA FOTOMÉTRICA

MTL232

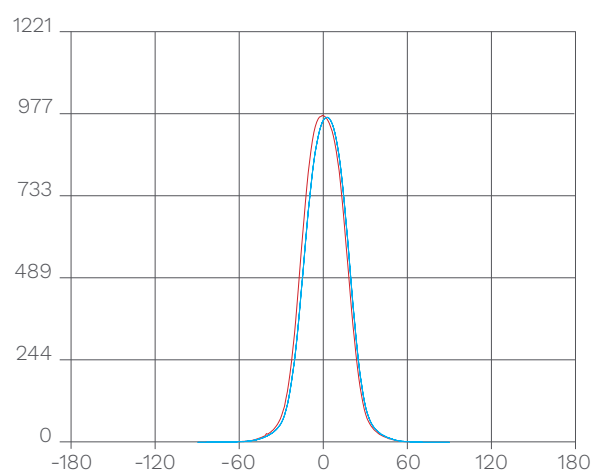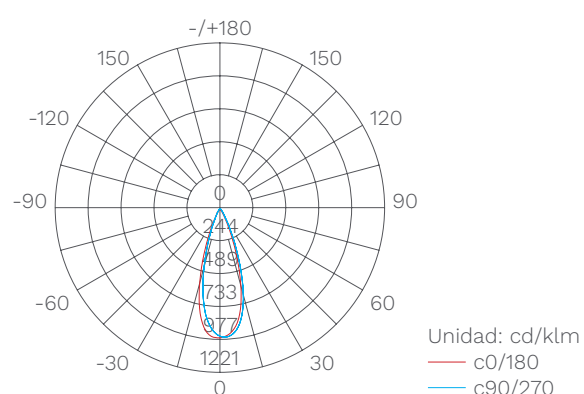

GARANTÍA 3 AÑOS	A 36°	— 180°	— 180°	III	ADAPT. MAGNÉTICO	48V	LED BRIDGELLUX	CHIP COB	IP20	66,66 lm/W	CRI ≥90	50.000 HRS	50.000	>0,9
UGR <22	F													