

SPOTLIGHT TWINS MINI MAGNET 2L


2x5W 36° 48V



INFORMACIÓN TÉCNICA

Cuerpo Aluminio
Difusor Policarbonato
Reflector / Embellecedor Aluminio



MTL312	□	SPOTLIGHT TWINS MINI MAGNET 2L	2x5W	2700K	640lm
MTL322	■	SPOTLIGHT TWINS MINI MAGNET 2L	2x5W	2700K	640lm
MTL332	■	SPOTLIGHT TWINS MINI MAGNET 2L	2x5W	3000K	700lm



Disponibilidad de reflector 15° (RF00089425) y reflector 24°

CURVA FOTOMÉTRICA

MTL332

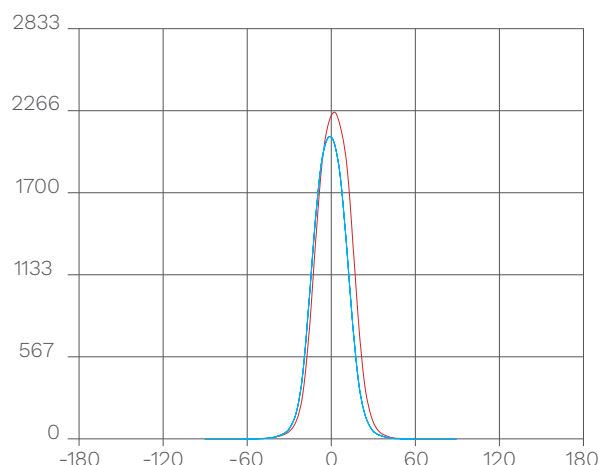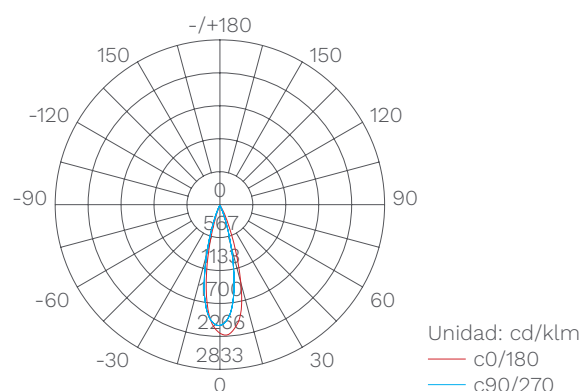

GARANTÍA 3 AÑOS	36°	180°	180°	III	ADAPT. MAGNÉTICO	48V	LED BRIDGELLUX	CHIP COB	IP20	66,66 lm/W	CRI ≥90	50.000 HRS	50.000	>0,9
UGR <22	F													